



10"/250 MM UNDERSEAT AMPLIFIED SUBWOOFER

Easy Underseat Installation

Power: 260 W (Max), 130 W (RMS)

Amplifier Class: AB

Low Level RCA and High-Level Inputs

Variable Gain Control

Low Pass Filter


Variable Bass Boost


Phase Control

Auto Power-ON (with Hi-Lev Inputs)

Remote Control

S/N Ratio	91dB
THD	0.05%
Sensitivity (1W)	92dB
Frequency Response	10Hz - 150Hz
Output Impedance	2 Ohm
Voltage	14.4V (10V - 16V)
Fuse Rating	15A
Audio In Sensitivity	RCA Input: 150mV
	Speaker Input: 1.5V
Input Gain	6V - 0.15V
Low-Pass Filter	50Hz - 150Hz
Bass Boost	0 - 12dB
Phase Switch	O - 180°
Magnet Type	Ferrite
Enclosure Housing	Aluminum
Harness	DC Cord, Hi-Level
	and Low Level Input
	Speaker, Input Plug
Remote Control	Wired

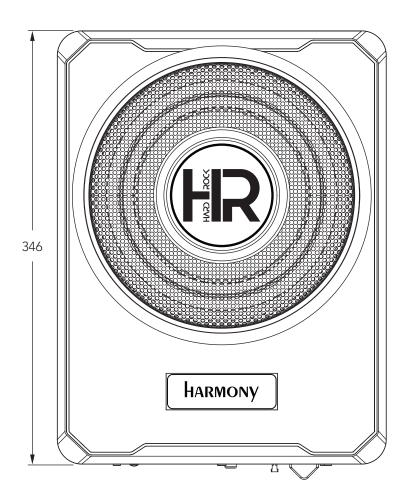

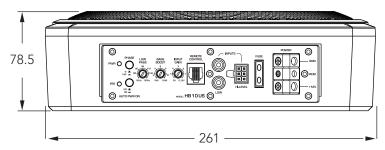

Control Panel

